

Wedge-Band® ARAMAX® V-Belts


- **SUPER HIGH PERFORMANCE BANDED BELT**
- **ARAMAX® CORD CONSTRUCTION**
- **EXCELS ON TOUGH OIL FIELD AND INDUSTRIAL APPLICATIONS**

Recommended Pulleys
Special Pulleys
required—Contact Carlisle

The Wedge-Band Aramax is designed for extraordinary banded belt strength on the toughest belt drives. Ideally suited for oil field equipment, rock and quarry applications, lumber industry drives and heavy construction machinery. The exclusive Aramax® cord from Carlisle provides maximum protection against belt breakage due to shock loads.


Because of the high horsepower loads involved, standard 8V cast iron QD pulleys typically DO NOT have sufficient horsepower capacity to operate with the Aramax Band at the belt's rated horsepower. As a result, special pulleys are frequently required as well. These pulleys can also be supplied by Carlisle when required.

Due to the unique nature of these "super high performance" banded belts, no drive design literature is available. Rather, we strongly suggest that you work with our application engineering department for design assistance. This assures a safe and satisfactory drive.

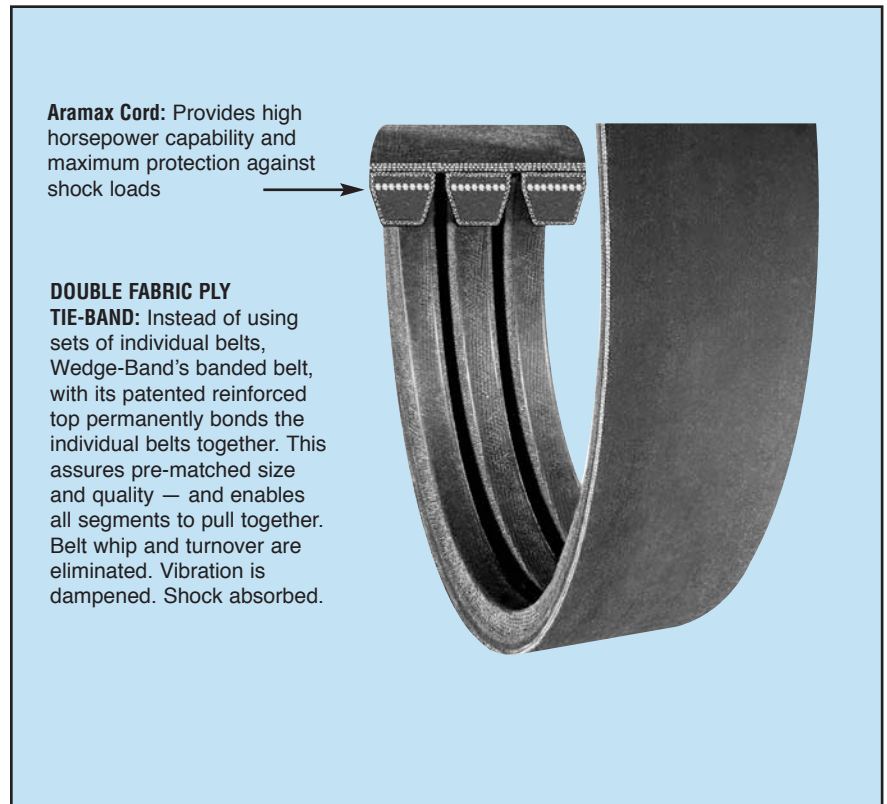

ORDERING INFORMATION

For complete part number, add number of ribs required.
EXAMPLE: R8VK3150-5

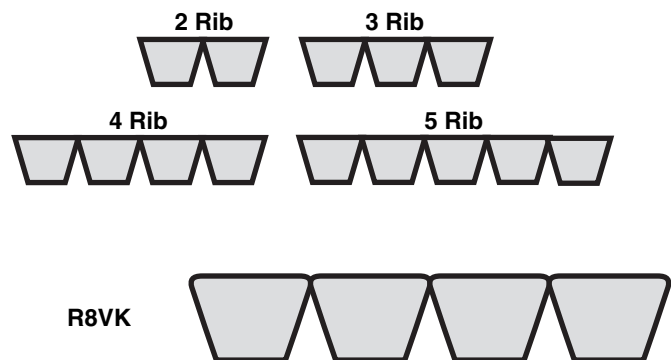

Wedge-Band® ARAMAX® V-Belts (continued)

Part No.	Number of Ribs	Outside Length (Inches)	Wt./Rib (Lbs.)
----------	----------------	-------------------------	----------------

R8V CROSS SECTION

R8VK2000-4	4	201.5	6.7
R8VK2000-5	5	201.5	6.7
* R8VK2000-6	6	201.5	6.7
* R8VK2000-8	8	201.5	6.7
* R8VK2000-10	10	201.5	6.7
R8VK2000-12	12	201.5	6.7
R8VK2120-4	4	213.1	7.1
R8VK2120-5	5	213.1	7.1
* R8VK2120-6	6	213.1	7.1
* R8VK2120-8	8	213.1	7.1
* R8VK2120-10	10	213.1	7.1
R8VK2120-12	12	213.1	7.1
R8VK2240-4	4	225.5	7.5
R8VK2240-5	5	225.5	7.5
* R8VK2240-6	6	225.5	7.5
* R8VK2240-8	8	225.5	7.5
* R8VK2240-10	10	225.5	7.5
R8VK2240-12	12	225.5	7.5
R8VK2360-4	4	237.5	7.9
R8VK2360-5	5	237.5	7.9
* R8VK2360-6	6	237.5	7.9
* R8VK2360-8	8	237.5	7.9
* R8VK2360-10	10	237.5	7.9
R8VK2360-12	12	237.5	7.9
R8VK2500-4	4	251.5	8.4
R8VK2500-5	5	251.5	8.4
* R8VK2500-6	6	251.5	8.4
* R8VK2500-8	8	251.5	8.4
* R8VK2500-10	10	251.5	8.4
R8VK2500-12	12	251.5	8.4
R8VK2650-4	4	266.5	8.9
R8VK2650-5	5	266.5	8.9
* R8VK2650-6	6	266.5	8.9
* R8VK2650-8	8	266.5	8.9
* R8VK2650-10	10	266.5	8.9
R8VK2650-12	12	266.5	8.9
R8VK2800-4	4	281.5	9.2
R8VK2800-5	5	281.5	9.2
* R8VK2800-6	6	281.5	9.2
* R8VK2800-8	8	281.5	9.2
* R8VK2800-10	10	281.5	9.2
R8VK2800-12	12	281.5	9.2
R8VK3000-4	4	301.5	10.1
R8VK3000-5	5	301.5	10.1
* R8VK3000-6	6	301.5	10.1
* R8VK3000-8	8	301.5	10.1
* R8VK3000-10	10	301.5	10.1
R8VK3000-12	12	301.5	10.1
R8VK3150-4	4	316.1	10.6
R8VK3150-5	5	316.1	10.6
* R8VK3150-6	6	316.1	10.6
* R8VK3150-8	8	316.1	10.6
* R8VK3150-10	10	316.1	10.6
* R8VK3150-12	12	316.1	10.6
R8VK3350-4	4	336.1	11.3
R8VK3350-5	5	336.1	11.3
* R8VK3350-6	6	336.1	11.3

Part No.	Number of Ribs	Outside Length (Inches)	Wt./Rib (Lbs.)
----------	----------------	-------------------------	----------------

R8V CROSS SECTION

* R8VK3350-8	8	336.1	11.3
* R8VK3350-10	10	336.1	11.3
R8VK3350-12	12	336.1	11.3
R8VK3550-4	4	356.5	12.0
R8VK3550-5	5	356.5	12.0
* R8VK3550-6	6	356.5	12.0
* R8VK3550-8	8	356.5	12.0
* R8VK3550-10	10	356.5	12.0
R8VK3550-12	12	356.5	12.0
R8VK5600-4	4	561.5	18.9
R8VK5600-5	5	561.5	18.9
* R8VK5600-6	6	561.5	18.9
* R8VK5600-8	8	561.5	18.9
* R8VK5600-10	10	561.5	18.9
R8VK5600-12	12	561.5	18.9

Matching limit for sets is three adjacent sag numbers for all sizes listed above.

Maximum number of ribs available is 12.

* Non-Stock (6, 8 & 10 rib) — cut to order.

Contact Carlisle for availability.